

Product Portfolio

Wuppermann Staal Nederland B.V.


Wuppermann Stahl GmbH | Version: 1.0 | Valid from: 01.06.2023

■ Available ■ On request


1. Hot-dip galvanized strip

1.1 Dimensions (thickness ↓ x width → in mm)

1.1.1 For zinc coatings Z50 up to ≤ Z450

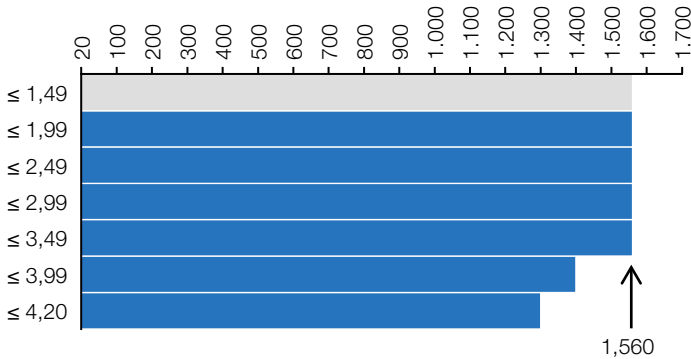

1.1.2 For zinc coatings > Z450 up to ≤ Z600

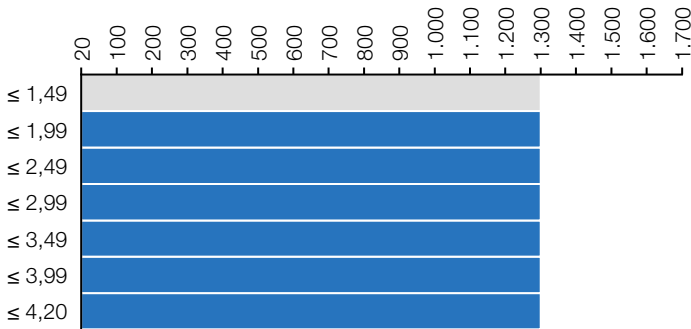

1.2 Zinc coatings



1.3 Steel grades

1.3.1 Steels for cold forming and deep drawing (EN 10346)

DX51D+Z	DX52D+Z	DX53D+Z
---------	---------	---------

1.3.2 Structural steels (EN 10346)

S220GD+Z	S250GD+Z	S280GD+Z
S320GD+Z	S350GD+Z	S390GD+Z
S420GD+Z	S450GD+Z	S500GD+Z ¹

1.4 Surface types

MA Normal surface	MB Improved surface
MC Best surface	

2. Further specifications

0.95 – 4.2 mm Strip thickness	32 t Max. coil weight	508 – 610 mm Inside diameter	1,100 – 2,000 mm Outside diameter	20 – 1,548 mm Slit strip (>4 mm thickness from 35 mm)	0.5 – 2.0 g/m ² Oiling available
Galvanized longitudinal edges (≥ 950 mm thickness) available	Differential galvanization (max. ratio 1:2) available	Chemical passivation available	Reduced thickness tolerance available		

Product Portfolio

Wuppermann Staal Nederland B.V.

Wuppermann Stahl GmbH | Version: 1.0 | Valid from: 01.06.2023

Wuppermann Stahl GmbH

Ottostraße 5
D-51381 Leverkusen

Phone +49 2171 5000 800
info.ws@wuppermann.com

Wuppermann France S.A.S

104 Avenue Albert 1er
Les passerelles
F-92500 Rueil Malmaison

Phone +33 611 090 781
info.wf@wuppermann.com

Wuppermann Tube and Steel AB

Stora Ävägen 21
SE-43634 Askim

Phone +46 31 60 72 70
info.wts@wuppermann.com

Wuppermann Otel România S.R.L.

9 Prof. Dr. Ioan Cantacuzino street
Sector 1
RO-011437 Bukarest

Phone +40 749 066 886
info.wor@wuppermann.com

Wuppermann Staal Nederland B.V.

Vlasweg 15
Havenno. 175
NL-4782 PW Moerdijk

Phone +31 168 357 100
info.wsn@wuppermann.com

Notes: